


COMPONENTS

<p>Handle FALA</p> <p>textile door stop, inserted 14 mm x 4 mm</p> <p>Length: 2.5 m, 2.7 m</p>	<p>Top track Blue</p> <p>75 mm</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m, 6.0 m</p>	<p>Bottom track Blue-V</p> <p>Option 1</p> <p>48 mm</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m, 6.0 m</p>	<p>Bottom track Blue-C</p> <p>Option 2</p> <p>42 mm</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m, 6.0 m</p>	<p>Rubber finishing profile for bottom track</p> <p>Length: 50.0 m</p>	<p>Gasket 4 mm</p> <p>4</p> <p>10</p>	<p>Gasket 4.5 mm</p> <p>4.5</p> <p>10</p>
<p>Top horizontal profile/SIMPLE 10 mid-rail</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m</p>	<p>Bottom horizontal profile Simple 10</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m</p>	<p>Guiding carriage Blue 10 asymetrical</p> <p>(Set)</p>	<p>Bottom carriage Simple/Blue 10 V</p> <p>Option 1</p> <p>(Set)</p>	<p>Bottom carriage Simple/Blue 10 C</p> <p>Option 2</p> <p>(Set)</p>	<p>Self-tapping screw Ø6.3x32</p>	

Dimensions of opening

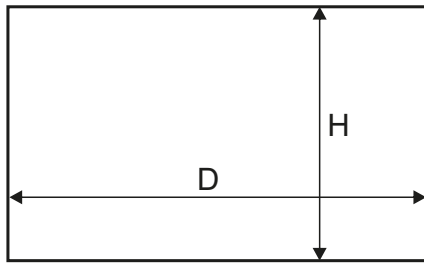



handle length = door height

door filling - # 10 mm board, # 4 mm mirror or # 4.5 mm safety glass


door height	- h	$h = H - 35 \text{ mm}$
- without soft-close		$h = H - 39 \text{ mm}$
- with soft-close Simple MINI (bottom carriage Blue 10V)		$h = H - 42 \text{ mm}$
- with soft-close Simple MINI (bottom carriage Blue 10C)		
board height	- hb	$hb = h - 65 \text{ mm}$
door width	- w	$w = (W - 3 \text{ mm} + Z) : N$
board width	- wb	$wb = w - 17 \text{ mm}$
horizontal profile length	- L	$L = U = w - 33.2 \text{ mm}$
upper horizontal profile length	- U	
mirror height	- hm	$hm = hb$
mirror width	- wm	$wm = wb - 4 \text{ mm}$

number of doors	- N	2	3
total overlap	- Z	30 mm	60 mm



visual design – 4 wings	
	$w = (W + 87) : 4$
	$w = (W : 2 + 27) : 2$

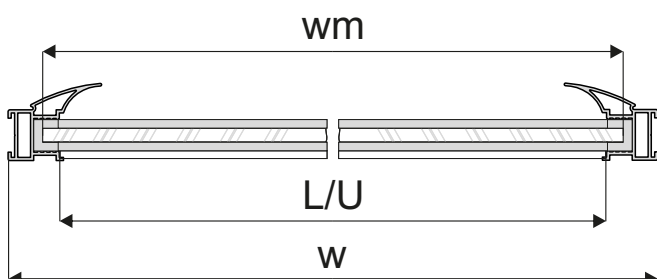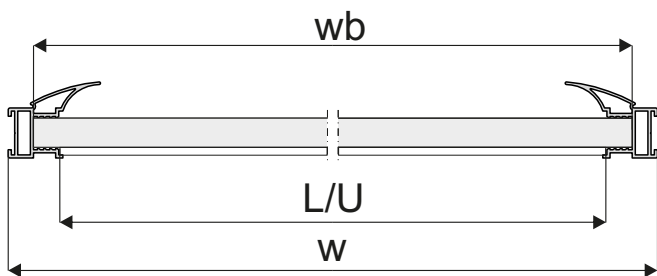


Dimensions helpful during installation of horizontal mid-rails in Simple 10 Frame systems



Installation method for fitting 10 mm board (diag. A) and 4 mm mirror or glass (diag. B)

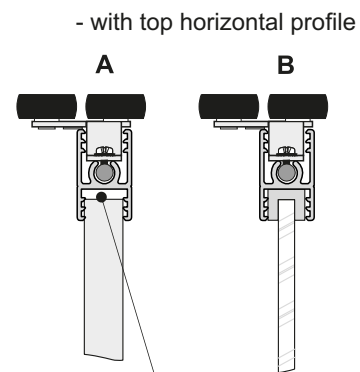

Expansion gap taken into account when calculating the height of chipboard

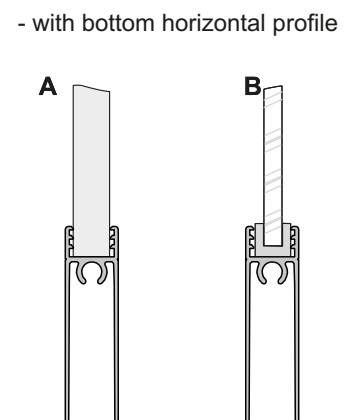

ATTENTION!

Mirror (4mm) should be used with a safety backing film. Safety glass (4.5mm) comprises of two thin layers with a film in-between. Both mirror and glass need fitting gasket.