


COMPONENTS

<p>Handle Uno</p> <p>textile door stop, self-adhesive 4.8 mm x 4 mm</p> <p>Length: 2.7 m</p>	<p>Top track Simple</p> <p>68 mm</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m, 6.0 m</p>	<p>Bottom track Simple</p> <p>44 mm</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m, 6.0 m</p>	<p>Rubber finishing profile for bottom track</p> <p>Length: 2.0 m, 3.0 m, 6.0 m, 50.0 m</p>	<p>Angle section Mini</p> <p>11 mm x 17 mm</p> <p>Length: 1.7 m, 2.35 m, 3.0 m</p>	<p>Guiding carriage Simple 18 Board symmetrical</p> <p>(Set)</p>	<p>Bottom carriage Simple 18V Board</p>
---	---	--	--	---	---	--

Dimensions of opening

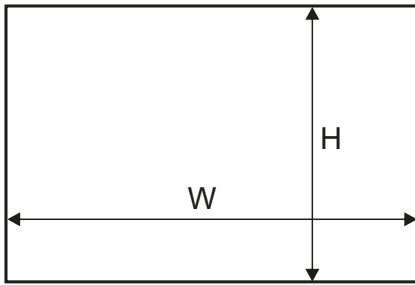


handle length = door height

door filling – #18 mm board

door height - without soft-close - with soft-close Simple MINI and Simple CENTRAL	- h	$h = H - 36 \text{ mm}$ $h = H - 42 \text{ mm}$
board height	- hb	$hb = h - 1 \text{ mm}$
door width	- w	$w = (W - 3 + Z) : N$
board width	- wb	$wb = w - 36 \text{ mm}$
angle section length	- la	$la = w - 66 \text{ mm}$


number of doors	- N	2	3
total overlap	- Z	33 mm	66 mm

visual design – 4 wings	
	$w = (W + 96) : 4$
	$w = (W : 2 + 30) : 2$

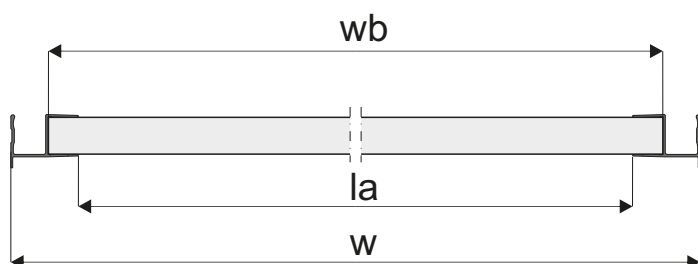


- When fitting handle profiles,
do not use assembly adhesive

Installation method for handle and guiding carriage with # 18 mm board

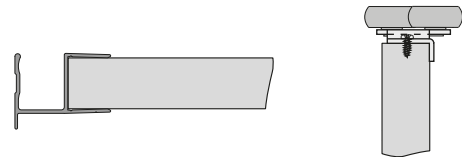

Installation method for angle section 11 mm x 17 mm

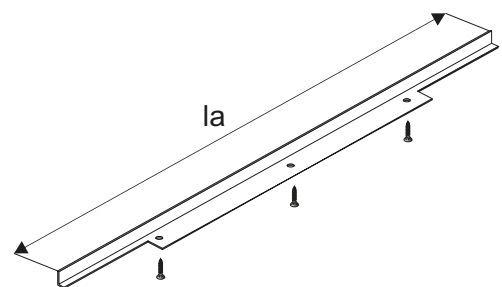

WARNING

We do not bear any responsibility for deformation resulting from the application of improper quality of boards (improper storage, improper humidity).